

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
9 October 2003 (09.10.2003)

PCT

(10) International Publication Number
WO 03/082479 A1

(51) International Patent Classification⁷: B05C 17/02, 17/025, 17/035

(21) International Application Number: PCT/SG03/00015

(22) International Filing Date: 24 January 2003 (24.01.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
200201815-8 1 April 2002 (01.04.2002) SG

(71) Applicant and

(72) Inventor: ER, Poh, Leong [SG/SG]; Blk 2, No. 449 Lor 3, Geylang, Singapore 388920 (SG).

(74) Agent: LAWRENCE Y D HO & ASSOCIATES PTE LTD.; 30 Bideford Road, #07-01 Thongsia Building, Singapore 229922 (SG).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: A PAINT ROLLER FOR SELECTIVELY APPLYING PAINT AT SURFACE CORNERS

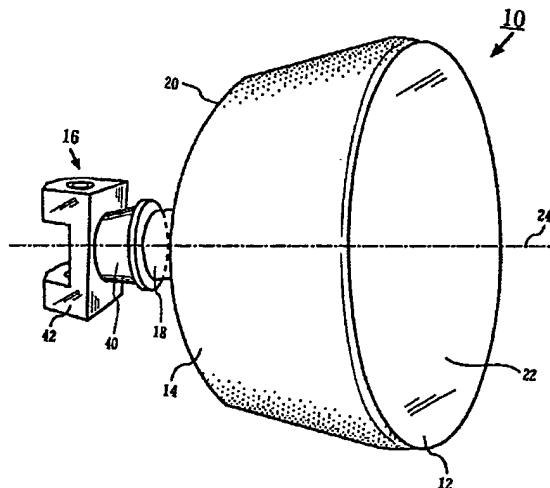

(57) **Abstract:** A paint roller (10) has a frustoconically-shaped applicator (12), a paint-absorbable member (14) and a movement coupler (16). The applicator (12) has a coupling portion (18) and two opposite ends (20, 22) and is rotatable at the coupling portion (18) about a rotary axis (24). The end (20) is a coupling end (20) that has a planar cross-section smaller than that of the other end (22). The coupling portion (18) is formed at the coupling end (20) and is disposed centrally thereat. The movement coupler (16) has a rotary connecting portion (40) that is detachably coupled to the applicator (12) at the coupling portion (40) that is detachably coupled to the applicator (12) at the coupling portion (18) for rotary movement about the rotary axis (24) and a pivotal connecting portion (42) that is adapted to coact with a pivot mount of a handle (not shown) for pivotal movement of the applicator (12).

WO 03/082479 A1

BEST AVAILABLE COPY